




0640 SPECIAL CERAMICS


0640 Series Special Porous Ceramic Cylinder Specifications

You have requested a quotation for a specialized porous ceramic cylinder. To provide a reasonable and accurate quotation we will need you to fill in this specifications sheet completely. As you might surmise, we cannot guess at your specific requirements, nor are we able to quote on unknowns, so please let us know as much about the product you require and the environment that it will be used in. Thanks!

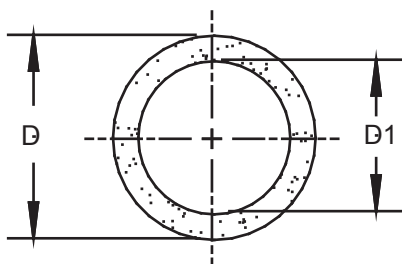

DIMENSIONAL REQUIREMENTS

Outer Diameter D _____ In. or _____ mm
 Inner Diameter D1 _____ In. or _____ mm
 Length of Cyl. L _____ In. or _____ mm



TOLERANCES OF FABRICATION: Select One

Standard Tolerance - "As Cast"

"As Cast" tolerance for D1 generally .032 in (.8 mm), D2 is formed by wall build up and is generally .093 in (2.38 mm), L is generally .093 in (2.38 mm) for items 1- 4 inches (25 -100 mm). Sizes larger and smaller than 1- 4 inches (25-100 mm) may vary more or less than those indicated.

Precision Tolerances Required - Please specify below

Outer Diameter D +/- _____ In. or +/- _____ mm
 Inner Diameter D1 +/- _____ In. or +/- _____ mm
 Length of Cyl. L +/- _____ In. or +/- _____ mm

640D#L#S

Porous Ceramic Cylinders

MATERIAL REQUIREMENTS *Please select the material for fabrication. If several wanted, number in order of priority.*

.5 bar HF 1bar HF 1 bar STD 2 bar STD 2 bar HF 3 bar STD 5 bar STD 15 bar
B0.5M2 B01M3 B01M1 B02M1 B02M2 B03M1 B05M1 B15M1

QUANTITY REQUIREMENTS *Please select no more than 2 quantities to be quoted.*

1 Only 1-5 ea. 6-24 ea. 25-49 ea. 50-149 ea. 150-500 ea. _____

SPECIAL REQUIREMENTS *Please describe any special requirements required such as glazing, assembly, epoxy joining, testing, labeling, etc. - sketch requirements on the drawing above.*

DESCRIPTION OF USE *Please describe use without divulging proprietary information.*

FOR SOILMOISTURE USE ONLY

SPECIAL PART NO. _____ **Delivery** _____ **Days**